Nandi Housing - preliminary feasibility test

Blocked: At least one check fails. This scheme cannot proceed as entered.

ASSESSMENT 2026-11-02

SITE AREA	ROAD WIDTH	LAND-USE CATEGORY	MAX FAR CANDIDATE	FAR AREA BENCHMARK
2,200 m²	18.50 m	Residential (Main)	2.50	5,500 m²

Option 01

HEIGHT 12 m — 4 floors

Survey boundary not imported

BUILDING SETBACK
Front 8.16 m; rear 5.44 m; sides 2.64 / 2.64 m

BASEMENT
Not included

GROUND FOOTPRINT
1,483 m²

APPROX. FLOOR AREA
5,932 m²

ACHIEVED FAR
2.70

432 m² above benchmark

Option 02

HEIGHT 15 m — 5 floors

Survey boundary not imported

BUILDING SETBACK
5.00 m on all sides

BASEMENT
Not included

GROUND FOOTPRINT
1,271 m²

APPROX. FLOOR AREA
6,355 m²

ACHIEVED FAR
2.89

855 m² above benchmark

Option 03

HEIGHT 18 m — 6 floors

Survey boundary not imported

BUILDING SETBACK
6.00 m on all sides

BASEMENT
Not included

GROUND FOOTPRINT
1,106 m²

APPROX. FLOOR AREA
6,636 m²

ACHIEVED FAR
3.02

1,136 m² above benchmark

FLOOR-AREA COMPARISON

Concept estimate compared with the maximum FAR-area benchmark

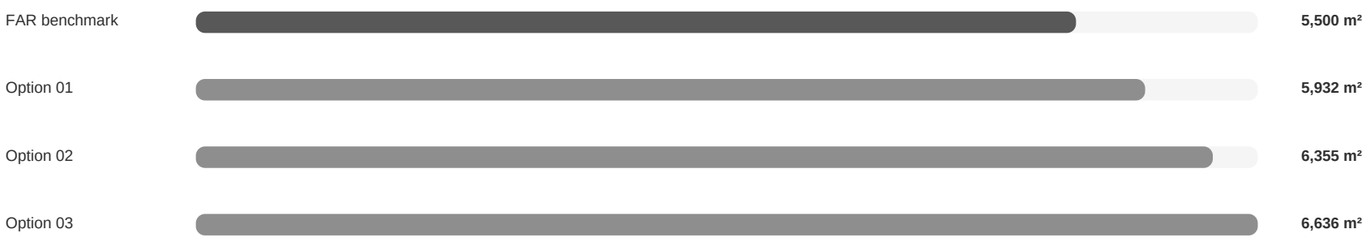

WHAT THE OPTIONS TELL US

3 option(s) exceed the benchmark; Option 01 is closest to it.

Highest calculated floor area: Option 03 — 6,636 m² (FAR on gross site area: 3.02).

Basement area is shown separately; it is not included in the above-ground gross FAR proxy.

Verify zone, road width, plot boundary, exclusions, fire, parking and applicable official setbacks before design freeze.