# Nandi Housing - preliminary feasibility test

BUILDING ENVELOPE + FAR COMPARISON · PRELIMINARY DESIGN STUDY — NOT SANCTION

**ASSESSMENT 2026-11-02**

| SITE AREA | ROAD WIDTH | LAND-USE CATEGORY | MAX FAR CANDIDATE | FAR AREA BENCHMARK |
|---|---|---|---|---|
| 2,200 m² | 18.50 m | Residential (Main) | 2.50 | 5,500 m² |

## Option 01

HEIGHT 12 m — 4 floors

*Survey boundary not imported*

BUILDING SETBACK
**Front 8.16 m; rear 5.44 m; sides 2.64 / 2.64 m**

BASEMENT
**Not included**

GROUND FOOTPRINT
**1,483 m²**

APPROX. FLOOR AREA
**5,932 m²**

ACHIEVED FAR
**2.70**

**432 m² above benchmark**

## Option 02

HEIGHT 15 m — 5 floors

*Survey boundary not imported*

BUILDING SETBACK
**5.00 m on all sides**

BASEMENT
**Not included**

GROUND FOOTPRINT
**1,271 m²**

APPROX. FLOOR AREA
**6,355 m²**

ACHIEVED FAR
**2.89**

**855 m² above benchmark**

## Option 03

HEIGHT 18 m — 6 floors

*Survey boundary not imported*

BUILDING SETBACK
**6.00 m on all sides**

BASEMENT
**Not included**

GROUND FOOTPRINT
**1,106 m²**

APPROX. FLOOR AREA
**6,636 m²**

ACHIEVED FAR
**3.02**

**1,136 m² above benchmark**

## FLOOR-AREA COMPARISON

Concept estimate compared with the maximum FAR-area benchmark

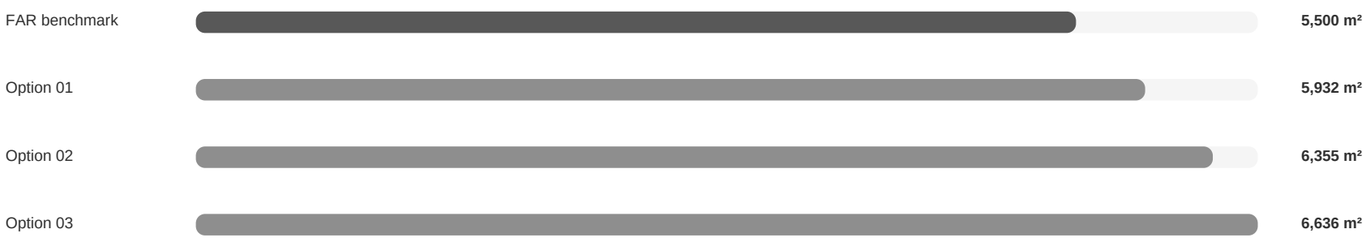


## WHAT THE OPTIONS TELL US

3 option(s) exceed the benchmark; Option 01 is closest to it.

Highest calculated floor area: Option 03 — 6,636 m² (FAR on gross site area: 3.02).

Basement area is shown separately; it is not included in the above-ground gross FAR proxy.

Verify zone, road width, plot boundary, exclusions, fire, parking and applicable official setbacks before design freeze.